

# Micro Duct End Stop Connector



## Application and Properties:


This Micro Duct End Stop Connector is used to seal the extremity of the microduct, to avoid the air, water, or other things entering the microduct, keep the microduct clean.

Push-Fit Micro Duct End Stop Connector operate at 15 BAR (218 psi) with a maximum permissible leakage rate of 1cc/min. This is equivalent to 1 bubble every 3 seconds. Higher pressures have been used in the field with no increase in leakage rate. Quick Burst rating is 25 BARS (363 psi).

Quality of the product is tested according to IEC Standards.

## - Other Details

- Made with High quality materials
- Available in Size and Color
- Excellent crush and tensile resistance.
- Excellent mechanical and environmental characteristic
- The End Cap can be attached and removed 10 times while still maintaining the same high performance characteristics.
- High temperature resistance  $-40^{\circ}\text{C} \sim 65^{\circ}\text{C}$
- Easy installation, without any special tools
- Compliance with ROHS, REACH, SVHC
- Standard EN50411-2-8

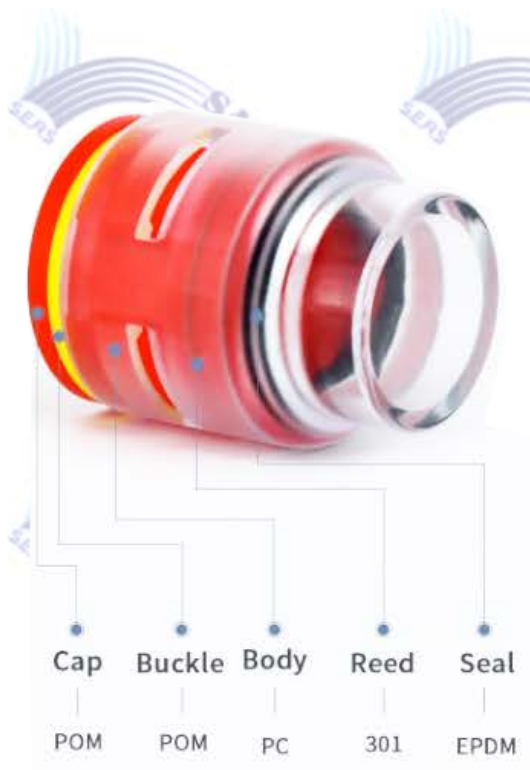

- Technical Specification

A	B	C	D	E
14.5	8.3	8	5.5	3.2
18.2	11.8	10.7	6.1	5.2
19.4	14.8	13.4	11	7.3
19.4	14.8	13.4	11	8.3
21.5	16.8	15.7	13.2	10.3
23.5	19	17.5	15.4	12.4
24.9	21.3	19.7	17.4	14.5
27.6	24.4	23	20	16.5
36.5	29	27.6	22.5	18.5
42.5	33.5	30.5	25.6	20.6

