


Patch Panel, 48 Cores

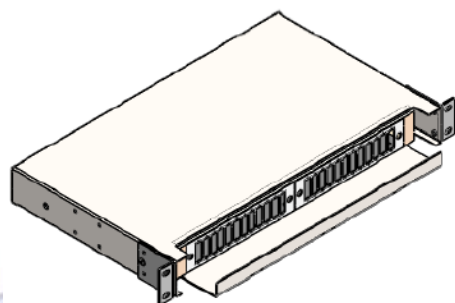

Application and Properties:

Patch panel used in connecting end points network cables and network equipment such as hub and router.

- Other Details

- Can manage both splices and terminations
- Loaded and Unloaded
- Rack-mounted
- For all common connector standards
- include adaptor panels for LC , SC , ST, FC termination (depending on customer request)
- Both Models fit Duplex and Simplex connection
- protection of fibers against destructive environmental factors
- Stainless Steel plate for strong housing
- Easy access to fibers within patch panel
- Useable for testing fiber optic
- Steel coated with electrostatic powder painting RAL7032
- Useable for Indoor & outdoor
- Easy installation
- Delivery with all accessories
- RoHS Compliance

- Technical Specification

Item	Data
Capacity	48 Cores Port Duplex , 2 Splice Tray 24 cores
Connector Type	LC/ SC/ ST/FC
Material	Stainless Steel
Dimensions (WxDxH), mm	19 inches, 1U, accordint to requet of customer
Thickness(mm) steel	1.5
Painting	Electrostatic Powder RAL 7032 or RAL 7035
Applicable	Indoor & outdoor
Standards	ISO/IEC 11801, ENS50173, EN297-1,IEC60304, GR-449-Cores ,RoHS, UL 94

Dimensions of 24 port patch panel

